




SoundTrack LxT®

A Real Breakthrough in Occupational Noise Analysis

Highlights

- Simple Operation – with just one hand!
- 30 hours operation using AA lithium batteries
- Large, bright, high-contrast LCD Screen
- 1/1 and 1/3 octave digital filters
- Extremely rugged – compact and lightweight
- Available in Class 1 or Class 2
- Multi-language for global compatibility
- Equiped with SLM Utility-G4 Software

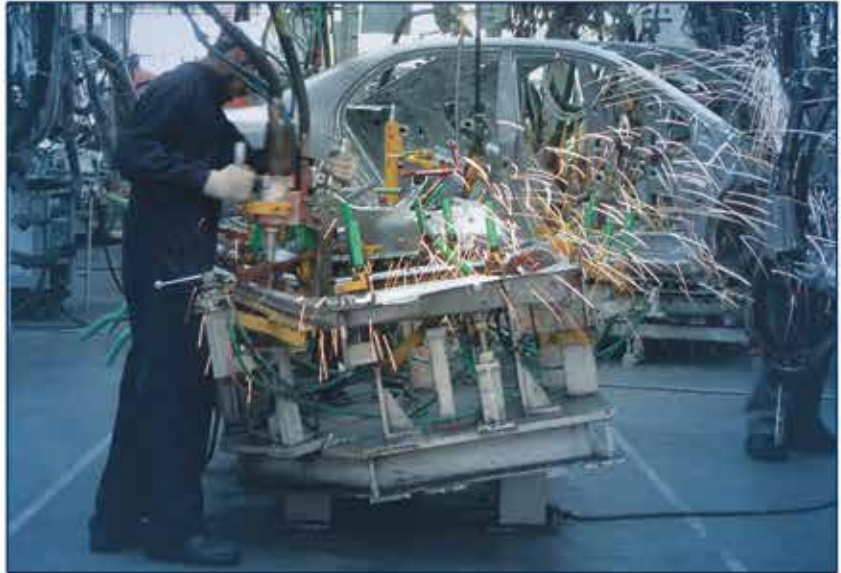

Multiple Measurements from one Sampling Session

- Real-time broadband display
- Real-time octave filters
- Real-time 1/3 octave filters
- Leq (average w/ 3 dB exchange rate)
- TWA
- Logging
- Lmax
- Lpeak
- Multiple dose and exposure calculations
- Time stamping of relevant metrics
- Digital voice annotation

A Revolutionary Approach to Workplace Noise Sampling

Over the years, various types of Sound Level and Octave Band Meters have been used by Industrial Hygienists and Safety Professionals for monitoring workplace noise, most requiring significant operator training and producing varying degrees of effectiveness. At Larson Davis, we believe this is because until now, Sound Level Meters were designed primarily for use by Acoustical Engineers, not for Safety and Health professionals.

The SoundTrack LxT® Sound Level Meter was developed to meet the unique needs of those involved in workplace noise exposure assessment and plant noise surveys. It is fully compliant with IEC and ANSI standards for Class 1 or Class 2 sound level meters. In addition, LXT files are fully compatible with the ISO 9612:2009 measurement strategies for task or job-based measurements.

With its sleek ergonomic design to its exceptional exposure data presentations, the SoundTrack LxT® is the perfect tool for gathering, analyzing, and presenting detailed noise environment data quickly, easily and concisely. New and better ways to organize your sampling methodology and annotate noise survey data save incredible amounts of time and provide better results – all at a price that won't consume your entire instrumentation budget.





SoundTrack LxT[®]

Easy to Use, Yet Powerful!

With its superior ergonomics and rugged compact design, SoundTrack LxT[®] allows you to capture the data you need while keeping one hand free – invaluable for juggling multiple tasks in hard-to reach locations. Once a test starts, LxT automatically performs all the necessary calculations of workplace exposure - to multiple compliance standards. With the ability to 'hide' display screens that are not relevant to your sampling strategy, the LxT is configurable for maximum utility and ease-of use. Add in the "Store when Stable (Leq)" feature and selective keypad lockout, and you can comfortably hand off the SoundTrack LxT[®] to minimally trained technicians with assurance of a positive outcome. No more skipped locations, questionable results and missing data points.

Digital Voice Annotation

Now you can record your own observations about the environment, the worker and tasks performed, or even whether proper hearing protection is worn – all at the push of a button, using the Digital Voice Note Recording option and included headset microphone. At the end of the day, recorded notes can be played back right from your PC – they are digitally stored with related noise data and exposure calculations for future reference.


Available Real-Time Octave Band Frequency Analysis

With optional 1/1 or 1/3 Real-Time Octave Band Frequency Analysis, the SoundTrack LxT[®] quickly captures frequency band data, because all Octave (or 1/3 Octave) measurements are performed simultaneously. No more tedious "stepping through" each Octave Band, as in the past – all data are captured from virtually the same point in time; which is vital for maximum accuracy in a varying noise environment. What's more, you'll save significant amounts of time performing Octave Band measurements, which are an important part of determining effectiveness of Engineering Controls or selecting proper hearing protection devices (HPD's).


SoundTrack LxT[®]
Shown with 1/3 Octave Frequency Analysis




Familiar Controls for Ease-of-use

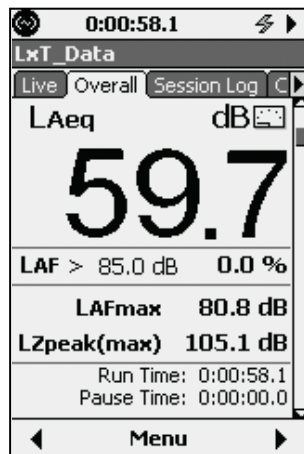

Large Numeric Display

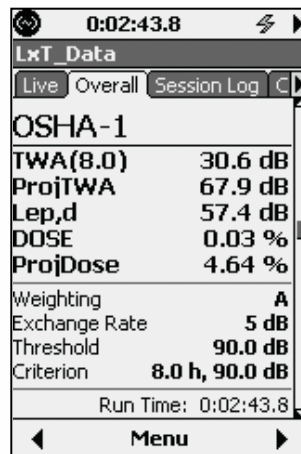

(2) Virtual Noise Dosimeters

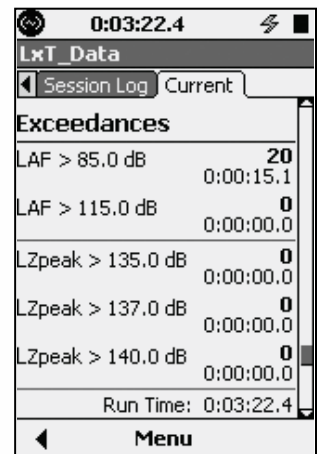

User Selectable Threshold Counters



Document - Manage - Examine - Present


Generate Clear, Concise Reports with Blaze® Software

Blaze® Software is an invaluable tool for generating the types of data reports and presentations you'll be proud to share with your colleagues, your workforce, and management. Color-rich graphic summary reports provide a picture of the noise environment with only the most relevant numeric data values, enabling everyone to quickly understand the nature of the noise exposure. With super-fast USB connection, you'll go from measurement to finished report in seconds. By accessing Blaze®'s more advanced features, you will be able to provide

higher-level analysis of the noise environment with as much additional annotation as needed. Copy and paste functions allow for inclusion of data into other report formats, and – for the most advanced users and research teams – a simple export function allows instant and automatic interface to popular spreadsheet programs.



Whether you'd like a one-page illustrated compliance report or a detailed breakdown of noise data, Blaze® delivers effortlessly – and supports other Larson Davis products like Spark® Noise Dosimeters and the HVM100 Vibration Exposure monitoring system. And, with our "no-hassle" software agreement, you'll never be hit with recurring licensing fees or other additional costs, should you choose to install Blaze® on other PC's or laptops within your organization.

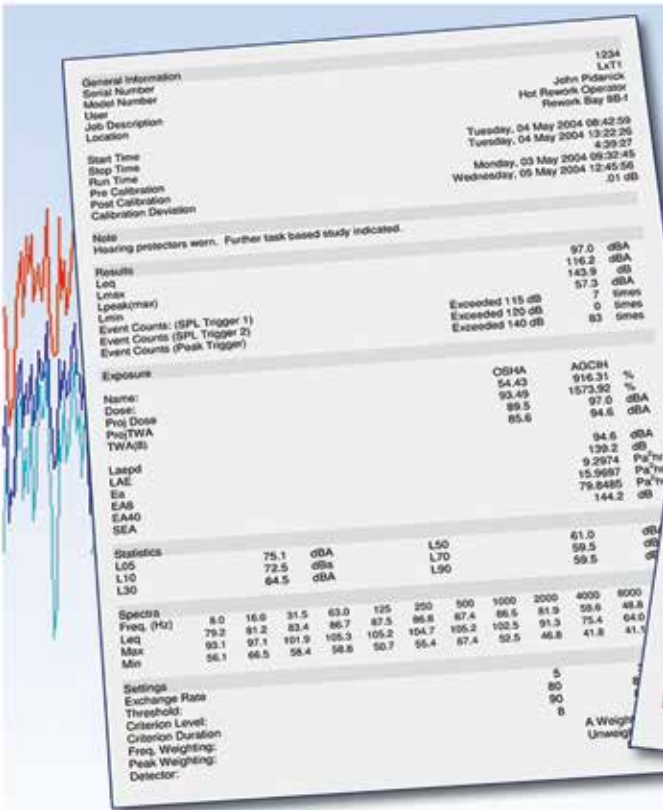

Compliance Data Report



Overall Data & Octave Band



Sound Level Meters for Safety & Health Professionals

General

Integrating Sound Level Meter - Time weighting: Slow, Fast, Impulse, TWA, Peak (peak has independently selectable frequency weighting) Frequency weighting: A, C, & Z, Octave, Fractional Octave (with OBA options). The SoundTrack N/Forcer comes with the next generation G4 LD Utility Software.

Measurement Range	LxT1	LxT2	LxT1L with optional LOW RANGE Pre-amp	LxT2L with optional LOW RANGE Pre-amp
	A	39 to 140 dB SPL	37 to 139 dB SPL	27 to 118 dB SPL
C	39 to 140 dB SPL	37 to 139 dB SPL	29 to 118 dB SPL	35 to 125 dB SPL
Z	44 to 140 dB SPL	42 to 139 dB SPL	34 to 118 dB SPL	42 to 125 dB SPL
Dynamic Range (A-weighted)	29 to 140 dB SPL	27 to 139 dB SPL	17 to 118 dB SPL	21 to 125 dB SPL
SPL maximum level	140 dB SPL	139 dB SPL	118 dB SPL	125 dB SPL
Peak level	143 dB	142 dB	121 dB	128 dB

Measurements (qty)

SPL, Leq, TWA (2), Lmin, Lmax, Lpeak, Lpeak (max), Dose (2), Proj. Dose (2), Lep,d, E, EB, E40, SEA, Ln (6), Event Counters (3); (2 RMS, 3 Peak)

Data Storage / Communication

Flash Data Storage: 2GB standard

Communication to PC via USB

Display / Keypad

Display: High contrast, monochrome, black on white, 1/8th VGA 160 x 240 dot graphics, 4 level grey-scale, bright white LED backlighting

Keypad: Silicone elastomer "quiet touch" with tactile feedback, 4 dedicated function keys, 3 context soft-keys, and 5 navigation keys

Power

Internal: 4 AA cells, 1.5 Volts each; Alkaline, NiMH, or Lithium

External: 5.0 VDC ±5%, 500mA maximum, USB powered

Battery life: Approximately 22 hours (alkaline cells), 30 Hours (lithium cells), depending on usage

Physical Characteristics

Dimensions: 8.8" L x 2.8" W x 1.6" D (22.4 cm x 7.1 cm x 4.1 cm), 11.5" L (29.2 cm) with preamplifier and microphone

Weight: 1.0 lbs (471 g), 1.1 lbs (513 g) with preamplifier and microphone

Environmental

Operating temperature: 14 to 122 °F (-10 to 50 °C)

Storage temperature: -22 to 140 °F (-30 to 60 °C)

Humidity: up to 95% non-condensing

International Protection Rating: IP 54

Standards Compliance

ANSI: S1.4-2014, S1.25-1991 (R 2007), S1.11-2004

IEC: 61672-1: 2013, 61672-2002, 60651-2001, 60804-2000, 61260-2001, 61252-2002

CE: Directive 2004/108/EC, IEC 61326-1:2005

Options and Accessories

Firmware Options

LXT-LOG	Time History Data Logging
LXT-HSLOG	High Speed Logging Option (to 100ms)
LXT-ENV	Measurement History (intervals)
LXT-CN	Community Noise, Ldn & Lden
LXT-DVA	Digital Voice Annotation
LXT-OB1	1/1 Octave Real Time Filters
LXT-OB3	1/1 and 1/3 Octave Real Time Filters

Accessories

LXT-ACC	Type 1 Accessory Kit - hard shell case, CAL200 calibrator, USB cable, AC adapter, windscreens and Utility Software
LXT-ACC1	Type 2 Accessory Kit - Hard shell case, CAL150 calibrator, USB cable, AC adapter, windscreens and G4 Utility software
LXT-CCS	Hard Shell Carrying Case
CAL150	Type 2 Microphone Calibrator
CAL200	Type 1 Microphone Calibrator
SWW-DNA	Advanced Analysis Software
SWW-DNA-LXT	DNA Instrument Driver for Model LxT
LXT-RPT	Full test report for new LxT

Ordering Information

LXT1	Class 1 SoundTrack LxT with preamplifier and free field microphone
LXT1L	Class 1 SoundTrack LxT with low range option, preamplifier and free field microphone
LXT1-RI	Class 1 SoundTrack LxT with preamplifier and random or diffuse field microphone
LXT1L-RI	Class 1 SoundTrack LxT with low range options, preamplifier and random or diffuse field microphone
LXT1B	Class 1 SoundTrack LxT meter only. Does not include preamplifier or microphone
LXT1-QPR	Class 1 SoundTrack LxT configured with 1/4 in. microphone for measuring high level sound (> 160 dB)
LXT1-NFR-PK1	Class 1 N'Forcer kit - includes SoundTrack LxT, CAL200 calibrator, portable printer, preamplifier, free field microphone, windscreens and padded carrying case
LXT2	Class 2 SoundTrack LxT with preamplifier and free field microphone
LXT2L	Class 2 SoundTrack LxT with low range option, preamplifier and free field microphone
LXT2B	Class 2 SoundTrack LxT meter only. Does not include preamplifier or microphone
LXT2-NFR-PK1	Class 2 N'Forcer kit - includes SoundTrack LxT, CAL150 calibrator, portable printer, preamplifier, free field microphone, windscreens and padded carrying case

Complementary Industrial Hygiene Products

Noise Dosimeters

- 3 Compact
- 3 Rugged
- 3 100 Hour Battery Life



Vibration Exposure Monitors

- 3 Hand-Arm per ISO 5349, ANSI S2.7
- 3 Whole-Body per ISO 2631
- 3 Complete with sensors and easy to use



A PCB PIEZOTRONICS DIV.

3425 Walden Avenue, Depew, NY 14043-2495 USA

Phone 716-926-8243 • Toll-Free in USA 888-258-3222 • Fax 716-926-8215

E-mail sales@larsondavis.com • Web Site www.larsondavis.com

ISO 9001 CERTIFIED

© 2017 PCB Piezotronics, Inc. In the interest of constant product improvement, specifications are subject to change without notice. PCB, ICP, SoundTrack LXT, Spark, and Blaze are registered trademarks of PCB Piezotronics, Inc. HVMManager is a trademark of PCB Piezotronics, Inc. All other trademarks are property of their respective owners.

LD-SoundTrackLxT-1217

Printed in U.S.A.

For environmental noise monitoring and building acoustics, Larson Davis offers a full line of instruments, accessories and software. For personal noise and vibration exposure monitoring, Larson Davis complements this with sound level meters, personal noise dosimeters, human vibration meters, audiometric calibration systems and hearing conservation programs.

Visit www.larsondavis.com to locate your nearest sales office