



MODEL BAS006

IMPULSIVE NOISE SOURCE

- Use for ISO 10140, ISO 140, DIN 52210, and BS 5821 Measurements
- Maintenance Free Design
- Simple, Easy-to-Use

TYPICAL APPLICATIONS

- Measuring reverberation time
- Building acoustics
- Room acoustics

REVERBERATION TIME MEASUREMENTS


The BAS006 is an innovative device used to create impulsive noise that includes low frequency energy and avoids problems like secondary bounce. These characteristics make it a great choice for quickly measuring reverberation time when the complexity and weight of a speaker and amplifier is not needed.

Use the BAS006 with a Larson Davis sound level meter to automatically detect the impulse and perform the ensemble averaging so you can measure decay times quickly with full results right on the meter.

Data can then be imported from the Larson Davis sound level meter into DNA Software for full analysis and reporting capability.

Specifications	
Model Number	BAS006
Acoustic (Typical)	
Peak Sound Pressure	100 - 120 dB re 20 μ Pa
Hearing Protection	Required during use
Repeatability	Good with minimal practice
Mechanical	
Size (H x W x L)	24 x 8 x 5 in (61 x 20 x 8 cm)
Weight	11.4 lb (5.2 kg)

Related Products	
831-RI	Model 831 Sound Level Meter
831-RT	Reverberation Time Option for Model 831
BAS001	Omnidirectional Sound Source
BAS002E/U	Lightweight Amplifier for BAS001 and BAS003
BAS003	Directional Source
BAS004	Tapping Machine
TRP023	Heavy Duty Tripod for BAS001 or BAS003
SWW-DNA-BA	DNA Software option for Building Acoustics

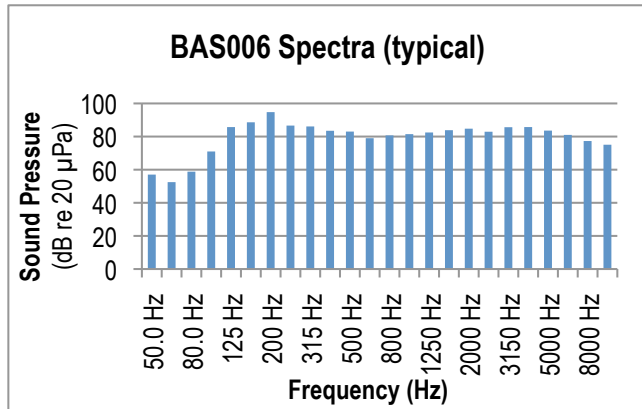

RELATED BUILDING ACOUSTICS PRODUCTS



BAS003
Directional Source



BAS001
Omnidirectional Source




BAS004
Tapping Machine



TRP023
Heavy Duty Tripod



831-RI
Sound Level Meter

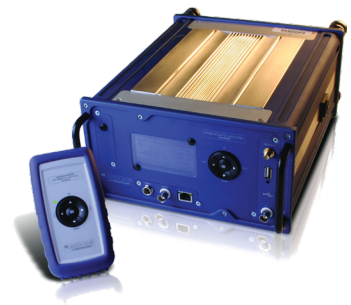

BAS002U/E
Lightweight Power Amplifier



3425 Walden Avenue, Depew, NY 14043-2495 USA

Toll-Free in the USA: 888 258 3222

Phone: 1 716 926 8243 | Email: sales@larsondavis.com

Larson Davis offers a full line of noise and vibration measurement instrumentation such as Class 1 and 2 sound level meters, outdoor noise monitoring systems, personal noise dosimeters, human vibration meters, audiometric calibration systems, microphones and preamplifiers, and data analysis software. Instrumentation is used in community and environmental noise monitoring, measurement of building acoustics, managing worker exposure to noise and vibration, and various automotive, aerospace, and industrial applications. Larson Davis is a division of PCB Piezotronics, Inc., a wholly owned subsidiary of MTS Systems Corporations.

© 2019 Larson Davis. In the interest of constant product improvement, specifications are subject to change without notice. PCB®, ICP®, Swiveler®, Modally Tuned®, and IMI® with associated logo are registered trademarks of PCB Piezotronics, Inc. in the United States. ICP® is a registered trademark of PCB Piezotronics Europe GmbH in Germany and other countries. UHT-12™ is a trademark of PCB Piezotronics, Inc. SensorLine™ is a service mark of PCB Piezotronics, Inc. SWIFT® is a registered trademark of MTS Systems Corporation in the United States. All other trademarks are property of their respective owners.

DS-0207 revA 0519



MTS Sensors, a division of MTS Systems Corporation (NASDAQ: MTSC), vastly expanded its range of products and solutions after MTS acquired PCB Piezotronics, Inc. in July, 2016. PCB Piezotronics, Inc. is a wholly owned subsidiary of MTS Systems Corp.; IMI Sensors and Larson Davis are divisions of PCB Piezotronics, Inc.; Accumetrics, Inc. and The Modal Shop, Inc. are subsidiaries of PCB Piezotronics, Inc.