

Performance

Voltage Sensitivity (± 20 %)
Measurement Range
Frequency Range (- 5 %)
Resonant Frequency
Electrical Filter Roll-off
Electrical Filter Corner Frequency
Broadband Resolution (1 to 10000 Hz)
Non-Linearity
Transverse Sensitivity

ENGLISH

1.0 mV/g
± 5000 g pk
2 to 4000 Hz
≥ 55 kHz
6 dB/octave
20 kHz
0.03 g rms
≤ 2.5 %
≤ 5 %

SI

0.1 mV/(m/s ²)
± 49050 m/s ² pk
2 to 4000 Hz
≥ 5 kHz
6 dB/octave
20 kHz
0.29 m/s ² rms
≤ 2.5 %
≤ 5 %

Notes

- [2]
- [1]
- [1]
- [1]
- [3]

Environmental

Overload Limit (Shock)
Temperature Range (Operating)
Temperature Response

± 10000 g pk
-65 to +250 °F
See Graph

± 98100 m/s ² pk
-54 to +121 °C
See Graph

Electrical

Excitation Voltage
Constant Current Excitation
Output Impedance
Output Bias Voltage
Discharge Time Constant
Settling Time (within 10 % of bias)
Spectral Noise (1 Hz)
Spectral Noise (10 Hz)
Spectral Noise (100 Hz)
Spectral Noise (1 kHz)

18 to 30 VDC
2 to 20 mA
≤ 200 Ohms
7 to 12 VDC
1.5 to 3.0 s
< 10 s
9000 µg/√Hz
2500 µg/√Hz
800 µg/√Hz
250 µg/√Hz

18 to 30 VDC
2 to 20 mA
≤ 200 Ohms
7 to 12 VDC
1.5 to 3.0 s
< 10 s
88290 (µm/s ²)/√Hz
24525 (µm/s ²)/√Hz
7848 (µm/s ²)/√Hz
2453 (µm/s ²)/√Hz

- [1]
- [1]
- [1]
- [1]

Physical

Sensing Element
Sensing Geometry
Housing Material
Sealing
Size (Height x Length x Width)
Weight
Electrical Connector
Electrical Connector Position
Mounting Thread

Ceramic
Shear
Titanium
Hermetic
0.40 x 0.77 x 0.40 in
0.18 oz
¼-28 4-Pin
Side
5-40 Female

Ceramic
Shear
Titanium
Hermetic
10.2 x 19.6 x 10.2 mm
5.0 gm
¼-28 4-Pin
Side
5-40 Female

- [1]




Notes

- [1] Typical
- [2] All axes filtered to provide -5 % between 4000 and 6000 Hz
- [3] Zero-based, least-square, straight line method

Supplied Accessories

NIST Traceable Calibration Certificate
Model 080A90 Mounting Stud, 10-32 to 5-40 (1)

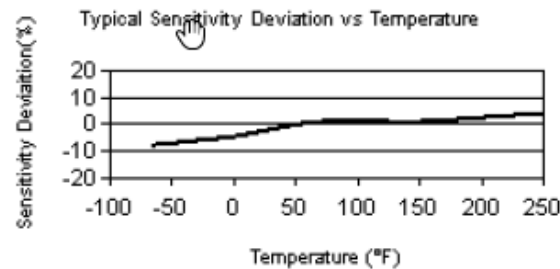

All specifications are at room temperature unless otherwise specified
In the interest of constant product improvement, we reserve the right to change specifications without notice.
ICP® is a registered trademark of PCB Piezotronics, Inc.



3425 Walden Ave
Depew, NY 14043
www.LarsonDavis.com